

QPD10-500-6000

10-Way, 0.5~6GHz

Features:

- * Small Size
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Mixers
- * Antennas
- * Laboratory Test

Electrical

Frequency:	0.5~6GHz
Insertion Loss:	5.8dB max.
Input VSWR:	1.5 max.
Output VSWR:	1.5 max.
Isolation:	18dB min.
Amplitude Balance:	1.5dB max.
Phase Balance:	±12°
Impedance:	50Ω
Average Power:	30W max. 2W max. as combiner

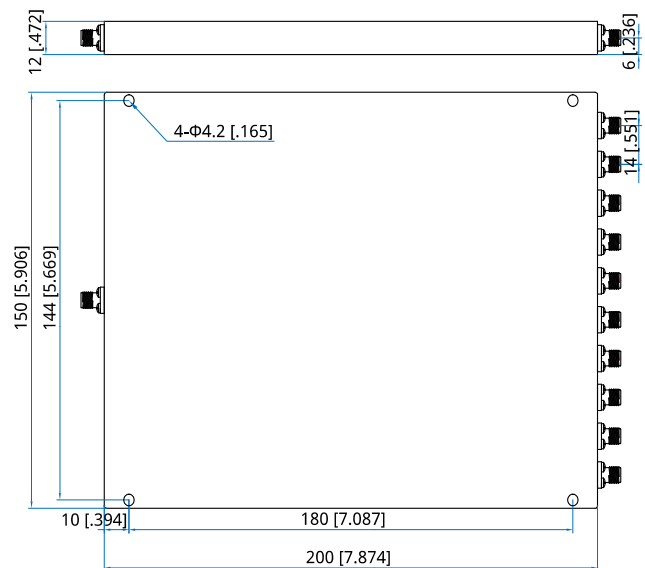
Mechanical

Size*1:	200*150*12mm 7.874*5.906*0.472in
Connectors:	SMA Female
Mounting:	4-Φ4.2mm through-hole

[1] Exclude connectors.

Environmental

Operation Temperature: -35~+75°C

Outline Drawings


Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

How To Order

QPD10-500-6000

Customization is available upon request.