

QPD10-600-6000-30-S

10-Way, 0.6~6GHz

Features:
 * Small Size
 * Low Insertion Loss

Applications:
 * Amplifiers
 * Mixers
 * Antennas
 * Laboratory Test

Electrical

Frequency:	0.6~6GHz
Insertion Loss:	3.5dB max.
Input VSWR:	1.5 max.
Output VSWR:	1.4 max.
Isolation:	18dB min.
Amplitude Balance:	0.8dB max.
Phase Balance:	±12°
Impedance:	50Ω
Average Power:	30W max. 2W max. as combiner

Mechanical


Size*1:	150*148*12mm 5.906*5.827*0.472in
Weight:	800g
Connectors:	SMA Female
Mounting:	4-Φ3.2mm through-hole

[1] Exclude connectors.

Environmental

Operation Temperature:	-45~+85°C
------------------------	-----------

Outline Drawings

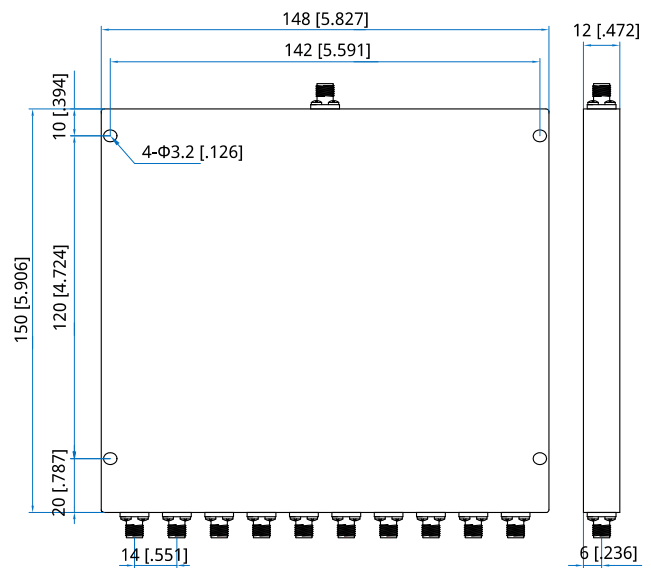

Unit: mm [in]
 Tolerance: ±0.5mm [±0.02in]

How To Order

QPD10-600-6000-30-S

Customization is available upon request.