

QPD16-200-2000

16-Way, 0.2~2GHz

Features:

- * Small Size
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Mixers
- * Antennas
- * Laboratory Test

Electrical

Frequency:	0.2~2GHz
Insertion Loss:	3.5dB max.
Input VSWR:	1.5 max.
Output VSWR:	1.25 max.
Isolation:	20dB min.
Amplitude Balance:	±0.2dB max.
Phase Balance:	±2°
Impedance:	50Ω
Average Power:	30W max. 2W max. as combiner

Mechanical


Size*1:	160*370*20mm 6.299*14.567*0.787in
Input Connector:	N Female
Output Connector:	SMA Female
Mounting:	6-Φ4.2mm through-hole

[1] Exclude connectors.

Environmental

Operation Temperature:	-40~+70°C
------------------------	-----------

Outline Drawings

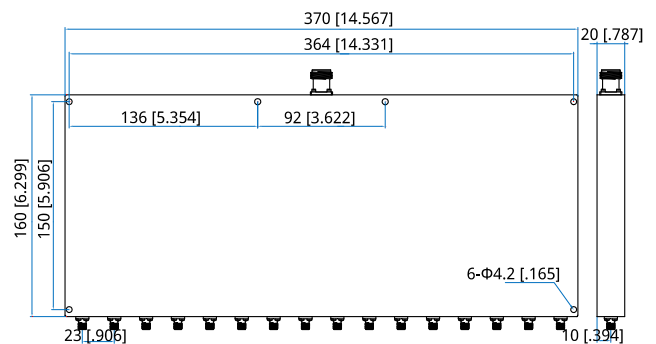

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

How To Order

QPD16-200-2000

Customization is available upon request.