

# QPD16-400-6000

16-Way, 0.4~6GHz

**Features:**

- \* Small Size
- \* Low Insertion Loss

**Applications:**

- \* Amplifiers
- \* Mixers
- \* Antennas
- \* Laboratory Test

**Electrical**

Frequency:	0.4~6GHz
Insertion Loss:	5.0dB max.
Input VSWR:	1.5 max.
Output VSWR:	1.3 max.
Isolation:	18dB min.
Amplitude Balance:	0.5dB max.
Phase Balance:	±8°
Impedance:	50Ω
Average Power:	30W max. 2W max. as combiner

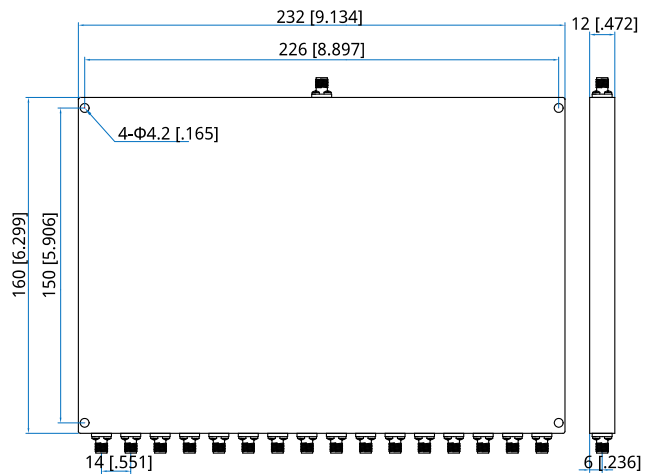
**Mechanical**

Size*1:	160*232*12mm 6.299*9.134*0.472in
Connectors:	SMA Female
Mounting:	4-Φ4.2mm through-hole

[1] Exclude connectors.

**Environmental**

Operation Temperature:	-35~+75°C
------------------------	-----------

**Outline Drawings**


Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

**How To Order**

**QPD16-400-6000**

Customization is available upon request.