

## QPD16-5-1000-2-S

### 16-Way, 5~1000MHz, 2W

**Features:**

- \* Small Size
- \* Low Insertion Loss

**Applications:**

- \* Amplifiers
- \* Mixers
- \* Antennas
- \* Laboratory Test

**Electrical**


---

Frequency:	5~1000MHz
Insertion Loss:	24±2.0dB max.
Input VSWR:	1.3 max.
Output VSWR:	1.3 max.
Isolation:	24dB min.
Amplitude Balance:	±1.2dB
Impedance:	50Ω
Average Power:	2W

**Mechanical**


---

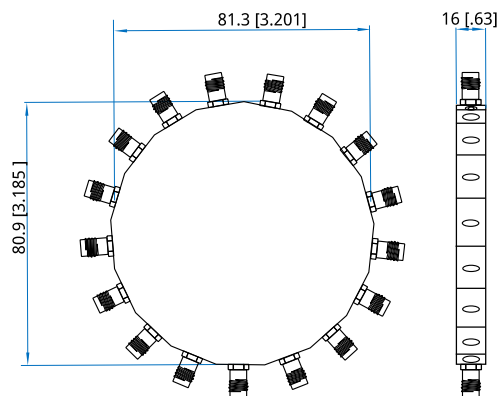
Size <sup>*1</sup> :	81.3*80.9*16mm 3.201*3.185*0.63in
Connectors:	SMA Female

[1] Exclude connectors.

**Environmental**


---

Operation Temperature:	-35~+75°C
------------------------	-----------

**Outline Drawings**


Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

**How To Order**

**QPD16-5-1000-2-S**

Customization is available upon request.