

## QPD16-5-300-1-S

### 16-Way, 5~300MHz

**Features:**

- \* Small Size
- \* Low Insertion Loss

**Applications:**

- \* Amplifiers
- \* Mixers
- \* Antennas
- \* Laboratory Test

**Electrical**

Frequency:	5~300MHz
Insertion Loss:	2.7dB max.
VSWR:	1.5 max.
Isolation:	18dB min.
Amplitude Balance:	±0.9dB max.
Phase Balance:	±15° max.
Impedance:	50Ω
Average Power:	1W max.

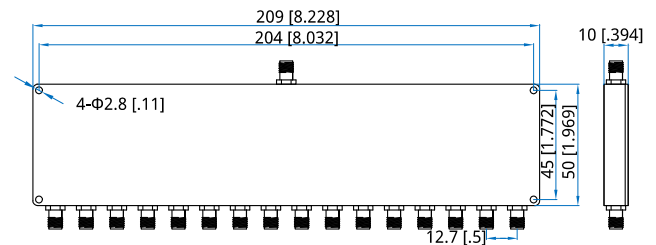
**Mechanical**

Size*1:	50*209*10mm 1.969*8.228*0.394in
Connectors:	SMA Female
Mounting:	4-Φ2.8mm through-hole

[1] Exclude connectors.

**Environmental**

Operation Temperature:	-40~+80°C
------------------------	-----------

**Outline Drawings**


Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

**How To Order**

**QPD16-5-300-1-S**

Customization is available upon request.