

# QPD16-5000-12000-20-S

## 16-Way, 5~12GHz

**Features:**

- \* Small Size
- \* Low Insertion Loss

**Applications:**

- \* Amplifiers
- \* Mixers
- \* Antennas
- \* Laboratory Test

**Electrical**

Frequency:	5~12GHz
Insertion Loss:	4.0dB max.
Input VSWR:	1.8 max.
Output VSWR:	1.5 max.
Isolation:	16dB min.
Amplitude Balance:	0.7dB max.
Phase Balance:	±10°
Impedance:	50Ω
Average Power:	20W max. 1W max. as combiner

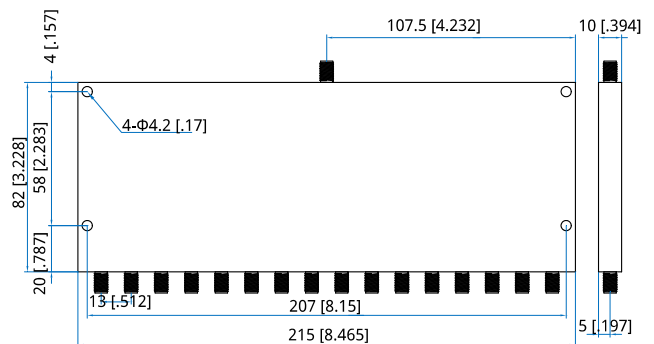
**Mechanical**

Size*1:	82*215*10mm 3.228*8.465*0.394in
Connectors:	SMA Female
Mounting:	4-Φ4.2mm through-hole

[1] Exclude connectors.

**Environmental**

Operation Temperature:	-45~+85°C
------------------------	-----------

**Outline Drawings**


Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

**How To Order**

**QPD16-5000-12000-20-S**

Customization is available upon request.