

QPD2-24250-52600-20-V

2-Way, 24.25~52.6GHz

Features:

- * Small Size
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Mixers
- * Antennas
- * Laboratory Test

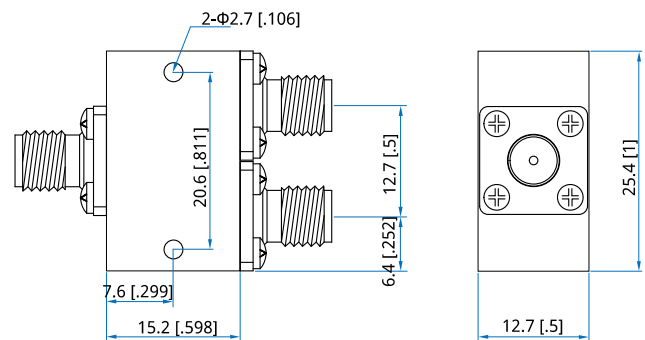
Electrical

| | |
|--------------------|---------------|
| Frequency: | 24.25~52.6GHz |
| Insertion Loss: | 1.5dB max. |
| Input VSWR: | 1.7 max. |
| Output VSWR: | 1.7 max. |
| Isolation: | 17dB min. |
| Amplitude Balance: | ±0.5dB max. |
| Phase Balance: | ±5° max. |
| Impedance: | 50Ω |
| Average Power: | 20W |

Mechanical

| | |
|----------------------|-----------------------------------|
| Size ^{*1} : | 25.4*15.2*12.7mm 1*0.598*0.5in |
| Connectors: | 1.85mm Female |
| Mounting: | 2-Φ2.7mm through-hole |

[1] Exclude connectors.

Outline Drawings


Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

How To Order

QPD2-24250-52600-20-V

Customization is available upon request.