

# QPD2-25500-25600-1-K

## 2-Way, 25.5~25.6GHz

**Features:**

- \* Small Size
- \* Low Insertion Loss

**Applications:**

- \* Amplifiers
- \* Mixers
- \* Antennas
- \* Laboratory Test

**Electrical**

Frequency:	25.5~25.6GHz
Insertion Loss:	0.8dB max.
Input VSWR:	1.5 max.
Output VSWR:	1.4 max.
Isolation:	18dB min.
Amplitude Balance:	±0.3dB
Phase Balance:	±3°
Impedance:	50Ω
Average Power:	1W

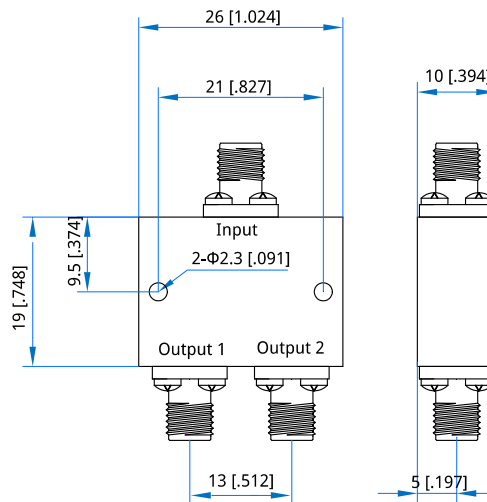
**Mechanical**

Size*1:	19*26*10mm 0.748*1.024*0.394in
Connectors:	2.92mm Female
Mounting:	2-Φ2.3mm through-hole

[1] Exclude connectors.

**Environmental**

Operation Temperature:	-45~+85°C
------------------------	-----------

**Outline Drawings**


Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

**How To Order**

**QPD2-25500-25600-1-K**

Customization is available upon request.