

QPD2-26000-54000-20-2

2-Way, 26~54GHz

Features:

- * Small Size
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Mixers
- * Antennas
- * Laboratory Test

Electrical

Frequency:	26~54GHz
Insertion Loss:	2.0dB max.
Input VSWR:	1.8 max.
Output VSWR:	1.8 max.
Isolation:	14dB min.
Amplitude Balance:	±0.8dB max.
Phase Balance:	±6° max.
Impedance:	50Ω
Average Power:	20W

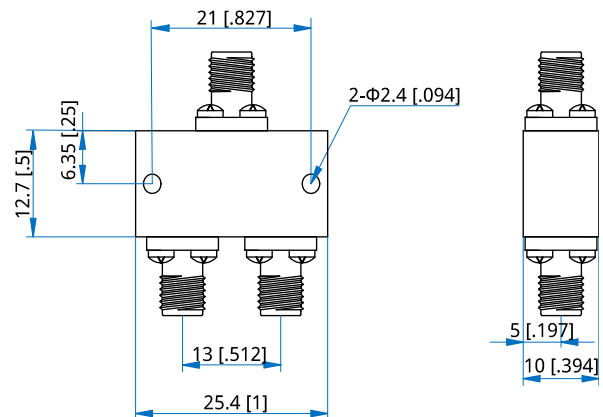
Mechanical

Size*1:	25.4*12.7*10mm 1*0.5*0.394in
Connectors:	2.4mm Female
Mounting:	2-Φ2.4mm through-hole

[1] Exclude connectors.

Environmental

Operating Temperature:	-35~+75°C
------------------------	-----------

Outline Drawings


Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

How To Order

QPD2-26000-54000-20-2

Customization is available upon request.