

QPD2-800-2700-30-S

2-Way, 0.8~2.7GHz

Features:
 * Small Size
 * Low Insertion Loss

Applications:
 * Amplifiers
 * Mixers
 * Antennas
 * Laboratory Test

Electrical

Frequency:	0.8~2.7GHz
Insertion Loss:	0.5dB max.
Input VSWR:	1.2 max.
Output VSWR:	1.2 max.
Isolation:	22dB min.
Amplitude Balance:	0.2dB max.
Phase Balance:	±3° max.
Impedance:	50Ω
Average Power:	30W max. 2W max. as combiner

Mechanical


Size*1:	35*43*14mm 1.378*1.693*0.551in
Weight:	48g
Connectors:	SMA Female
Mounting:	4-Φ2.8mm through-hole

[1] Exclude connectors.

Environmental

Operation Temperature:	-35~+75°C
------------------------	-----------

Outline Drawings

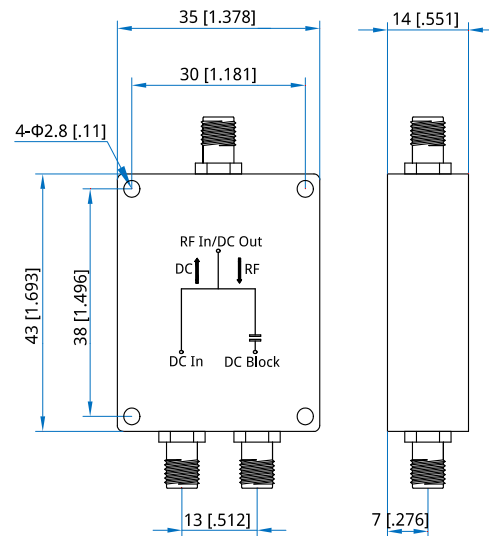

Unit: mm [in]
 Tolerance: ±0.5mm [±0.02in]

How To Order

QPD2-800-2700-30-S

Customization is available upon request.