

QPD3-0-6000-2-S

3-Way, DC~6GHz

Features:

- * Small Size
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Mixers
- * Antennas
- * Laboratory Test

Electrical

Frequency:	DC~6GHz
Insertion Loss:	11dB max.
Input VSWR:	1.4 max.
Output VSWR:	1.4 max.
Isolation:	9dB min.
Amplitude Balance:	± 0.7 dB
Phase Balance:	$\pm 10^\circ$
Impedance:	50 Ω
Average Power:	2W

Mechanical


Size* ¹ :	25.4*29.3*16mm 1*1.154*0.63in
Weight:	25g
Connectors:	SMA Female
Mounting:	2-M2, depth 5mm

[1] Exclude connectors.

Environmental

Operation Temperature:	-35~+75°C
------------------------	-----------

Outline Drawings

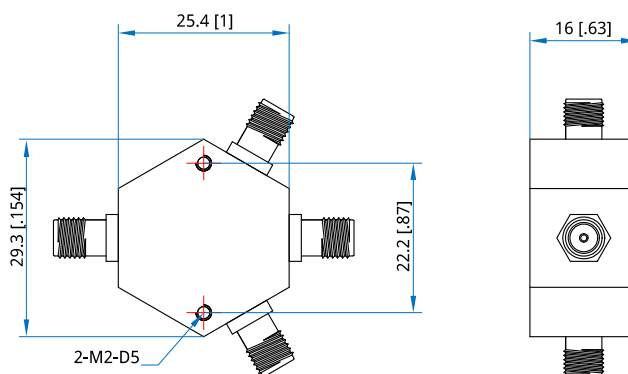

Unit: mm [in]

Tolerance: ± 0.5 mm [± 0.02 in]

How To Order

QPD3-0-6000-2-S

Customization is available upon request.