

QPD3-0-8000-2-S

3-Way, DC~8GHz

Features:
 * Small Size
 * Low Insertion Loss

Applications:
 * Amplifiers
 * Mixers
 * Antennas
 * Laboratory Test

Electrical

Frequency:	DC~8GHz
Insertion Loss:	13.4dB max.
Input VSWR:	1.6 max.
Output VSWR:	1.6 max.
Isolation:	8.9dB min.
Amplitude Balance:	±0.8dB
Phase Balance:	±8°
Impedance:	50Ω
Average Power:	2W

Mechanical


Size ^{*1} :	45*34*12.5mm 1.772*1.339*0.492in
Weight:	55g
Connectors:	SMA female
Mounting:	4-Φ2.8mm through-hole

[1] Exclude connectors.

Environmental

Operation Temperature:	-35~+75°C
------------------------	-----------

Outline Drawings

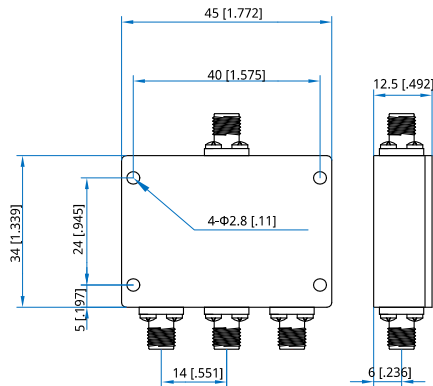

Unit: mm [in]
 Tolerance: ±0.5mm [±0.02in]

How To Order

QPD3-0-8000-2-S

Customization is available upon request.