

QPD3-2400-2500-20-S

3-Way, 2.4~2.5GHz

Features:

- * Small Size
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Mixers
- * Antennas
- * Laboratory Test

Electrical

Frequency:	2.4~2.5GHz
Insertion Loss:	0.8dB max.
Input VSWR:	1.25 max.
Output VSWR:	1.2 max.
Isolation:	30dB min.
Amplitude Balance:	±0.4dB
Phase Balance:	±4°
Impedance:	50Ω
Average Power:	20W max. 1W max. as combiner

Mechanical


Size* ¹ :	48*60*10mm 1.89*2.362*0.394in
Connectors:	SMA Female
Mounting:	4-Φ2.8mm through-hole

[1] Exclude connectors.

Environmental

Operation Temperature:	-35~+75°C
------------------------	-----------

Outline Drawings

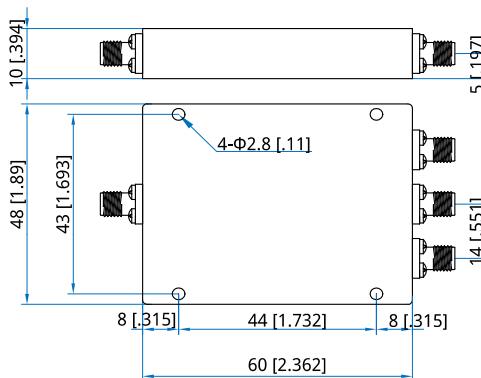

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

How To Order

QPD3-2400-2500-20-S

Customization is available upon request.