

QPD4-0-1000-2-S

4-Way, DC~1GHz, 2W

Features:

- * Small Size
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Mixers
- * Antennas
- * Laboratory Test

Electrical

Frequency:	DC~1GHz
Insertion Loss:	12.8dB max.
Input VSWR:	1.2 max.
Output VSWR:	1.2 max.
Isolation:	11.8dB min.
Amplitude Balance:	±0.5dB
Phase Balance:	±8°
Impedance:	50Ω
Average Power:	2W

Mechanical


Size*1:	25.4*22.2*16mm 1*0.87*0.63in
Weight:	28g
Connectors:	SMA Female (Stainless steel)
Mounting:	2-M2, depth 5mm

[1] Exclude connectors.

Environmental

Operation Temperature:	-45~+85°C
------------------------	-----------

Outline Drawings

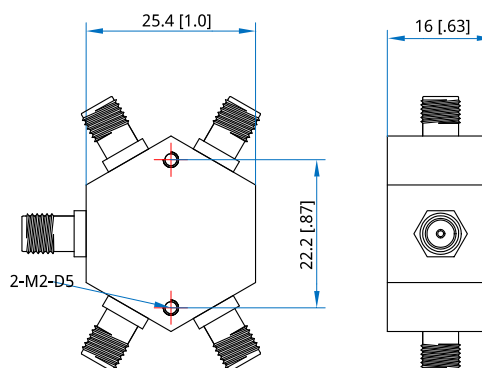

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

How To Order

QPD4-0-1000-2-S

Customization is available upon request.