

## QPD4-0-3000-2-S

### 4-Way, DC~3GHz, 2W

**Features:**

- \* Small Size
- \* Low Insertion Loss

**Applications:**

- \* Amplifiers
- \* Mixers
- \* Antennas
- \* Laboratory Test

**Electrical**

Frequency:	DC~3GHz
Insertion Loss:	13dB max.
Input VSWR:	1.3 max.
Output VSWR:	1.3 max.
Isolation:	12dB min.
Amplitude Balance:	±0.6dB
Phase Balance:	±10°
Impedance:	50Ω
Average Power:	2W

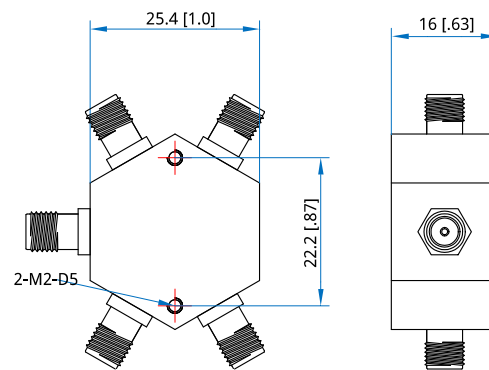
**Mechanical**

Size*1:	25.4*22.2*16mm 1*0.87*0.63in
Weight:	28g
Connectors:	SMA Female
Mounting:	2-M2, depth 5mm

[1] Exclude connectors.

**Environmental**

Operation Temperature:	-45~+85°C
------------------------	-----------

**Outline Drawings**


Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

**How To Order**

**QPD4-0-3000-2-S**

Customization is available upon request.