

## QPD4-0-4000-2-S

4-Way, DC~4GHz, 2W

**Features:**

- \* Small Size
- \* Low Insertion Loss

**Applications:**

- \* Amplifiers
- \* Mixers
- \* Antennas
- \* Laboratory Test

**Electrical**

Frequency:	DC~4GHz
Insertion Loss:	13.5dB max.
Input VSWR:	1.4 max.
Output VSWR:	1.4 max.
Isolation:	11dB min.
Amplitude Balance:	$\pm 0.7$ dB
Phase Balance:	$\pm 15^\circ$
Impedance:	50 $\Omega$
Average Power:	2W

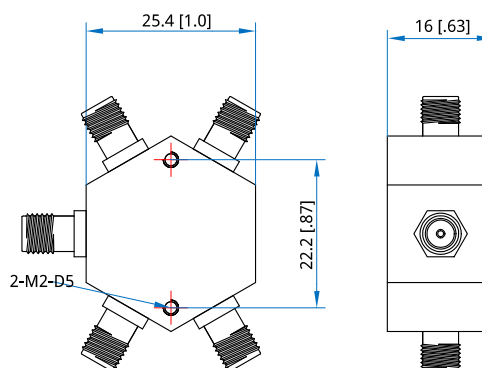
**Mechanical**

Size* <sup>1</sup> :	25.4*22.2*16mm 1*0.87*0.63in
Weight:	28g
Connectors:	SMA Female
Mounting:	2-M2, depth 5mm

[1] Exclude connectors.

**Environmental**

Operation Temperature:	-45~+85°C
------------------------	-----------

**Outline Drawings**


Unit: mm [in]

Tolerance:  $\pm 0.5$ mm [ $\pm 0.02$ in]

**How To Order**
**QPD4-0-4000-2-S**

Customization is available upon request.