

QPD4-2000-12000-20-S

4-Way, 2~12GHz

Features:

- * Small Size
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Mixers
- * Antennas
- * Laboratory Test

Electrical

Frequency:	2~12GHz
Insertion Loss:	1.6dB max.
Input VSWR:	1.5 max.
Output VSWR:	1.4 max.
Isolation:	17dB min.
Amplitude Balance:	0.4dB max.
Phase Balance:	±5°
Impedance:	50Ω
Average Power:	20W max. 1W max. as combiner

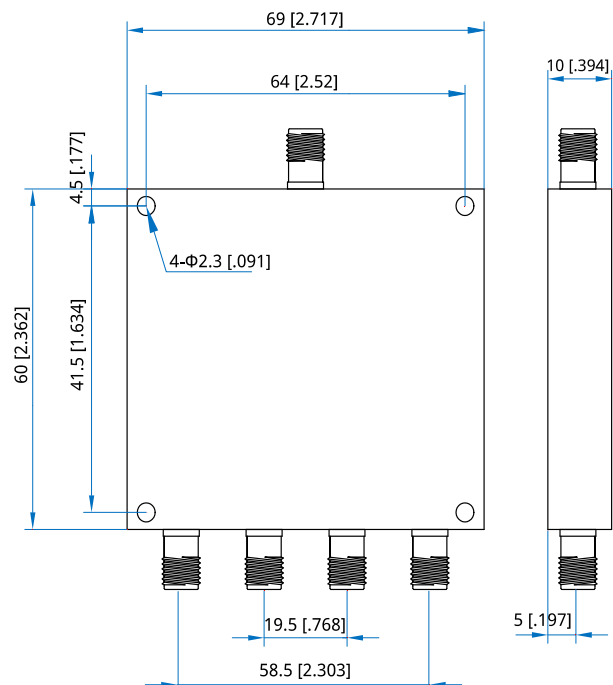
Mechanical

Size* ¹ :	69*60*10mm 2.717*2.362*0.394in
Weight:	108g
Connectors:	SMA Female
Mounting:	4-Φ2.3mm through-hole

[1] Exclude connectors.

Environmental

Operation Temperature:	-45~+85°C
------------------------	-----------

Outline Drawings


Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]

How To Order

QPD4-2000-12000-20-S

Customization is available upon request.