

QPD4-2000-6000

4-Way, 2~6GHz, 400W

Features:

- * Small Size
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Mixers
- * Antennas
- * Laboratory Test

Electrical

| | |
|--------------------|-------------|
| Frequency: | 2~6GHz |
| Insertion Loss: | 0.8dB max. |
| VSWR: | 1.6 max. |
| Isolation: | 15dB min. |
| Phase Balance: | 10° max. |
| Amplitude Balance: | ±0.5dB max. |
| Average Power: | 400W max. |

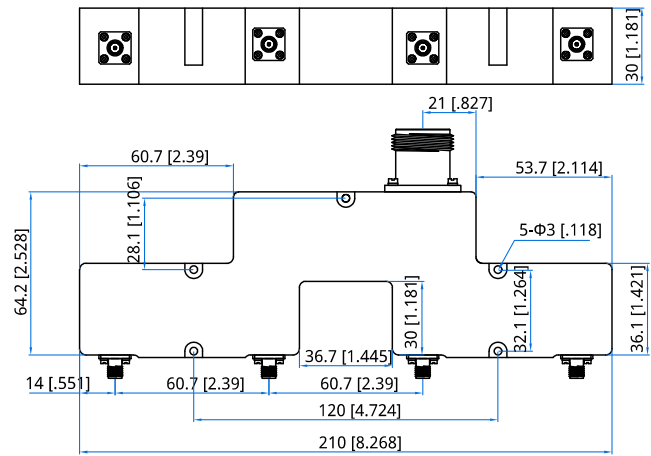
Mechanical

| | |
|-------------|--------------------------------------|
| Size*1: | 210*64.2*30mm 8.268*1.528*1.181in |
| Connectors: | SMA Female, N Female |
| Mounting: | 5-Φ3mm through-hole |

[1] Exclude connectors.

Environmental

| | |
|--------------|-----------|
| Temperature: | -55~+85°C |
|--------------|-----------|

Outline Drawings


Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

QPD4-2000-6000

Customization is available upon request.