

# QPD4-3400-3800-K1-N

## 4-Way, 3.4~3.8GHz

Features:  
 \* Small Size  
 \* Low Insertion Loss

Applications:  
 \* Amplifiers  
 \* Mixers  
 \* Antennas  
 \* Laboratory Test

### Electrical

Frequency:	3.4~3.8GHz
Insertion Loss:	0.6dB max.
Input VSWR:	1.25 max.
Output VSWR:	1.2 max.
Isolation:	20dB min.
Amplitude Balance:	±0.2dB
Phase Balance:	±3°
Impedance:	50Ω
Average Power:	100W max. 10W max. as combiner

### Mechanical


Size*1:	102*110*20mm 4.016*4.331*0.787in
Weight:	650g
Connectors:	N Female
Mounting:	4-Φ4.4mm through-hole

[1] Exclude connectors.

### Environmental

Operation Temperature:	-35~+75°C
------------------------	-----------

### Outline Drawings

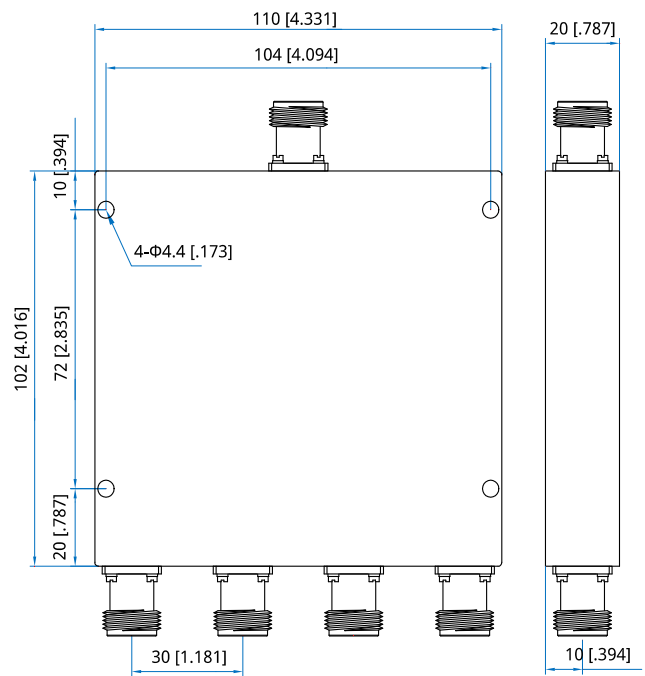

Unit: mm [in]  
 Tolerance: ±0.5mm [±0.02in]

### How To Order

**QPD4-3400-3800-K1-N**

Customization is available upon request.