

QPD4-380-460

4-Way, 0.38~0.46GHz

Features:

- * Small Size
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Mixers
- * Antennas
- * Laboratory Test

Electrical

Frequency:	0.38~0.46GHz
Insertion Loss:	0.5dB max.
Input VSWR:	1.25 max.
Output VSWR:	1.2 max.
Isolation:	20dB min.
Amplitude Balance:	0.3dB max.
Phase Balance:	$\pm 3^\circ$
Impedance:	50 Ω
Average Power:	100W max.
IP Grade:	IP67

Mechanical


Size ^{*1} :	150*118*30mm 5.906*4.646*1.181in
Connectors:	7/16 DIN Female

[1] Exclude connectors.

Environmental

Operation Temperature:	-35~+70°C
------------------------	-----------

Outline Drawings

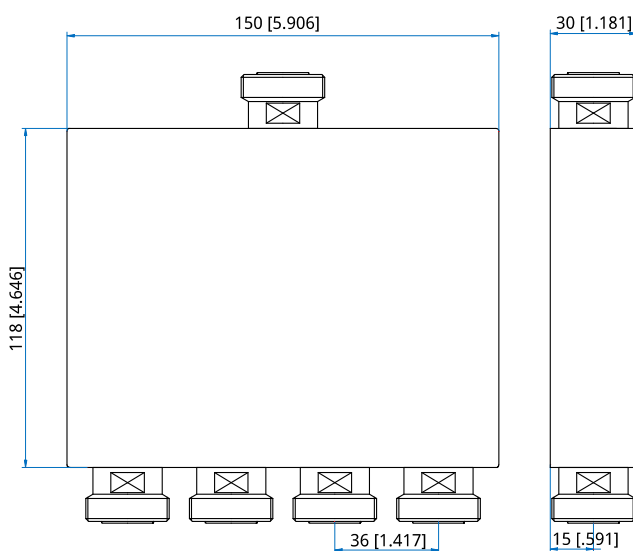

Unit: mm [in]

Tolerance: ± 0.5 mm [± 0.02 in]

How To Order

QPD4-380-460

Customization is available upon request.