

## QPD4-600-8000-30-S

4-Way, 0.6~8GHz

### Features:

- \* Small Size
- \* Low Insertion Loss

### Applications:

- \* Amplifiers
- \* Mixers
- \* Antennas
- \* Laboratory Test

### Electrical

Frequency:	0.6~8GHz
Insertion Loss:	2.2dB max.
Input VSWR:	1.3 max.
Output VSWR:	1.22 max.
Isolation:	20dB min.
Amplitude Balance:	0.3dB max.
Phase Balance:	±4°
Impedance:	50Ω
Average Power:	30W max. 2W max. as combiner

### Mechanical


Size* <sup>1</sup> :	110*58*10mm 4.331*2.283*0.394in
Weight:	150g
Connectors:	SMA Female
Mounting:	4-Φ3.4mm through-hole

[1] Exclude connectors.

### Environmental

Operation Temperature:	-45~+85°C
------------------------	-----------

### Outline Drawings

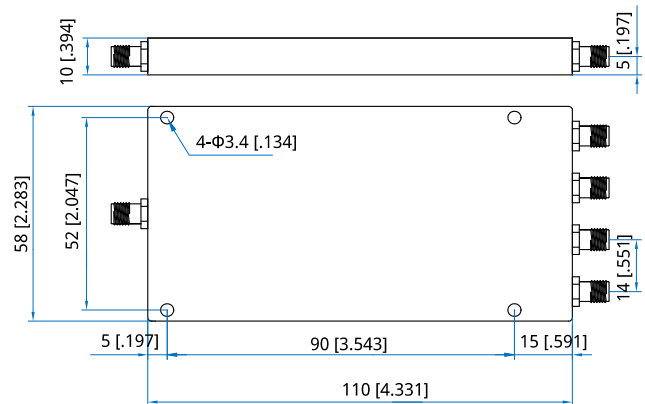

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

### How To Order

**QPD4-600-8000-30-S**

Customization is available upon request.