

## QPD6-0-6000-2-S

### 6-Way, DC~6GHz, 2W

Features:  
 \* Broadband  
 \* Low Insertion Loss  
 \* High Power

Applications:  
 \* Amplifiers  
 \* Mixers  
 \* Antennas  
 \* Laboratory Test

#### Electrical

Frequency:	DC~6GHz
Insertion Loss:	17±1.0dB max.
VSWR:	1.5 max.
Isolation:	16dB min.
Amplitude Balance:	±1.2dB
Impedance:	50Ω
Power Handling:	2W

#### Mechanical


Size <sup>*1</sup> :	33.7*32.9*16mm 1.327*1.295*0.63in
Connectors:	SMA Female
Mounting:	3-M2, depth 5mm

[1] Exclude connectors.

#### Environmental

Operation Temperature:	-35~+75°C
------------------------	-----------

#### Outline Drawings

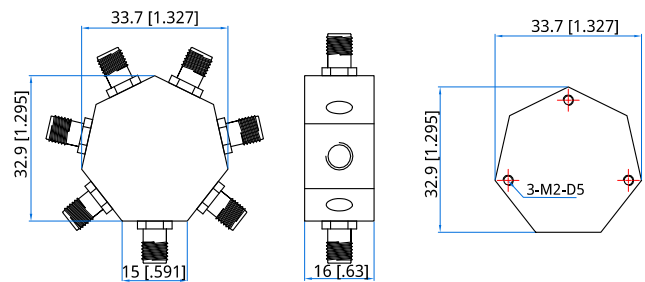

Unit: mm [in]  
 Tolerance: ±0.5mm [±0.02in]

#### How To Order

**QPD6-0-6000-2-S**

Customization is available upon request.