

QPD6-0-8000-2-S

6-Way, DC~8GHz, 2W

Features:
 * Broadband
 * Low Insertion Loss
 * High Power

Applications:
 * Amplifiers
 * Mixers
 * Antennas
 * Laboratory Test

Electrical

Frequency:	DC~8GHz
Insertion Loss:	18±1.0dB max.
VSWR:	1.5 max.
Isolation:	15dB min.
Amplitude Balance:	±1.5dB
Impedance:	50Ω
Power Handling:	2W

Mechanical


Size ^{*1} :	33.7*32.9*16mm 1.327*1.295*0.63in
Connectors:	SMA Female
Mounting:	3-M2, depth 5mm

[1] Exclude connectors.

Environmental

Operation Temperature:	-35~+75°C
------------------------	-----------

Outline Drawings

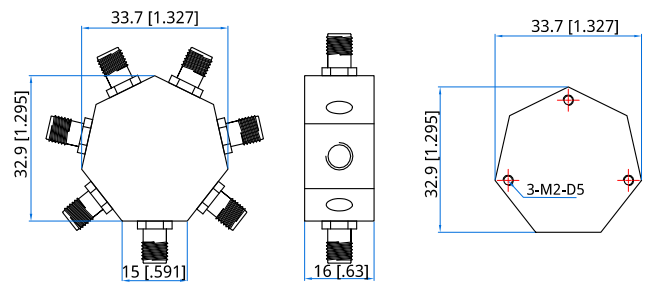

Unit: mm [in]
 Tolerance: ±0.5mm [±0.02in]

How To Order

QPD6-0-8000-2-S

Customization is available upon request.