

## QPD6-2000-18000-20-S

### 6-Way, 2~18GHz

Features:  
 \* Small Size  
 \* Low Insertion Loss

Applications:  
 \* Amplifiers  
 \* Mixers  
 \* Antennas  
 \* Laboratory Test

#### Electrical

Frequency:	2~18GHz
Insertion Loss:	2.6dB max.
Input VSWR:	1.5 max.
Output VSWR:	1.5 max.
Isolation:	16dB min.
Amplitude Balance:	±0.6dB
Phase Balance:	±8°
Impedance:	50Ω
Average Power:	20W max. 1W max. as combiner

#### Mechanical


Size*1:	109*76*10mm 4.291*2.992*0.394in
Weight:	300g
Connectors:	SMA Female
Mounting:	4-Φ3.4mm through-hole

[1] Exclude connectors.

#### Environmental

Operation Temperature:	-45~+85°C
------------------------	-----------

#### Outline Drawings

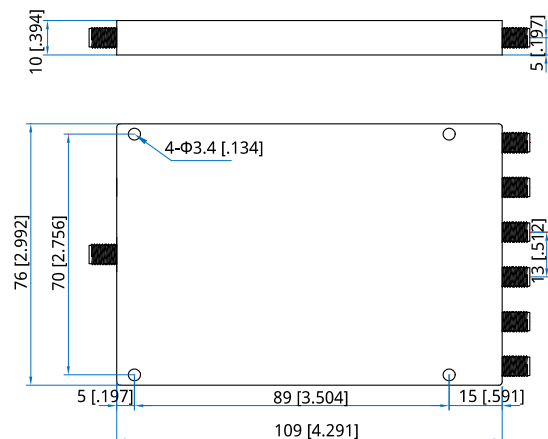

Unit: mm [in]  
 Tolerance: ±0.5mm [±0.02in]

#### How To Order

**QPD6-2000-18000-20-S**

Customization is available upon request.