

## QPD6-700-2700

### 6-Way, 0.7~2.7GHz

**Features:**

- \* Small Size
- \* Low Insertion Loss

**Applications:**

- \* Amplifiers
- \* Mixers
- \* Antennas
- \* Laboratory Test

### Electrical

Frequency:	0.7~2.7GHz
Insertion Loss:	1.0dB max.
Input VSWR:	1.3 max.
Output VSWR:	1.2 max.
Isolation:	20dB min.
Amplitude Balance:	0.5dB max.
Phase Balance:	±6°
Impedance:	50Ω
Average Power:	40W max. 2.5W max. as combiner

### Mechanical


Size <sup>*1</sup> :	124*98*12mm 4.882*3.858*0.472in
Connectors:	SMA Female
Mounting:	4-Φ3.4mm through-hole

[1] Exclude connectors.

### Environmental

Operation Temperature:	-35~+75°C
------------------------	-----------

### Outline Drawings

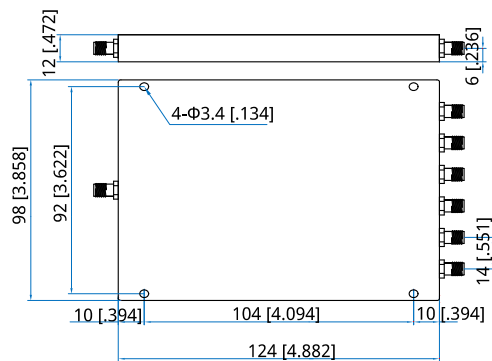

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

### How To Order

**QPD6-700-2700**

Customization is available upon request.