

## QPD8-0-4000-2-S

### 8-Way, DC~4GHz, 2W

**Features:**

- \* Small Size
- \* Low Insertion Loss

**Applications:**

- \* Amplifiers
- \* Mixers
- \* Antennas
- \* Laboratory Test

**Electrical**

Frequency:	DC~4GHz
Insertion Loss:	19.5dB max.
Input VSWR:	1.4 max.
Output VSWR:	1.4 max.
Isolation:	17dB min.
Amplitude Balance:	0.8dB max.
Phase Balance:	±8°
Impedance:	50Ω
Average Power:	2W

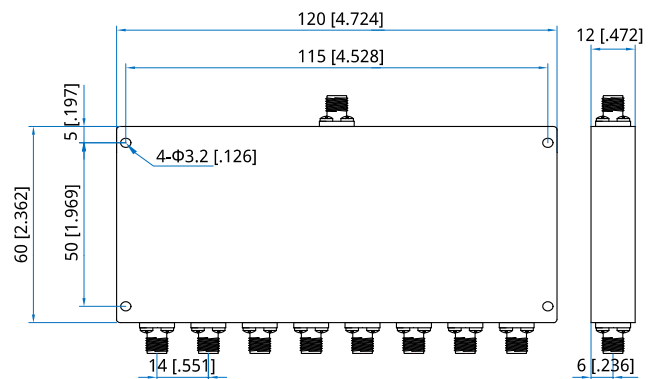
**Mechanical**

Size*1:	120*60*12mm 4.724*2.362*0.472in
Weight:	211g
Connectors:	SMA Female
Mounting:	4-Φ3.2mm through-hole

[1] Exclude connectors.

**Environmental**

Operation Temperature:	-35~+75°C
------------------------	-----------

**Outline Drawings**


Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

**How To Order**

**QPD8-0-4000-2-S**

Customization is available upon request.