



# QPD8-200-1000-K1-S

8-Way, 0.2~1GHz

Features: \* Small Size Applications:
\* Amplifiers
\* Mixers

\* Laboratory Test

#### **Electrical**

Frequency: 0.2~1GHz
Insertion Loss: 1dB max.
Input VSWR: 1.25 max.
Output VSWR: 1.2 max.
Isolation: 20dB min.

 $\begin{array}{lll} \mbox{Amplitude Balance:} & \pm 0.3 \mbox{dB} \\ \mbox{Phase Balance:} & \pm 4^{\circ} \\ \mbox{Impedance:} & 50 \mbox{\Omega} \\ \mbox{Average Power:} & 100 \mbox{W max.} \end{array}$ 

10W max. as combiner

#### Mechanical

Size\*1: 364\*208\*14mm

14.331\*8.189\*0.551in

Connectors: SMA Female


Mounting: 10-Φ3.5mm through-hole

[1] Exclude connectors.

### **Environmental**

Operation Temperature: -45~+85°C

## **Outline Drawings**

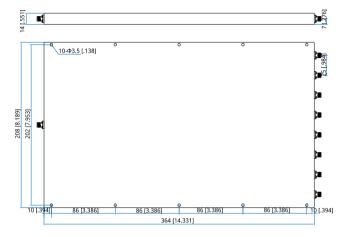

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

### **How To Order**

QPD8-200-1000-K1-S

Customization is available upon request.