

## QPD8-223-235

### 8-Way, 223~235MHz

Features:  
 \* Small Size  
 \* Low Insertion Loss

Applications:  
 \* Amplifiers  
 \* Mixers  
 \* Antennas  
 \* Laboratory Test

#### Electrical

Frequency:	223~235MHz
Insertion Loss:	1.2dB max.
Input VSWR:	1.3 max.
Output VSWR:	1.2 max.
Isolation:	20dB min.
Amplitude Balance:	0.4dB max.
Phase Balance:	±4°
Impedance:	50Ω
Average Power:	30W max. 2W max. as combiner

#### Mechanical


Size*1:	138*130*12mm 5.433*5.118*0.472in
Connectors:	SMA Female
Mounting:	4-Φ3.2mm through-hole 4-M3, depth 5mm

[1] Exclude connectors.

#### Environmental

Operation Temperature:	-35~+75°C
------------------------	-----------

#### Outline Drawings

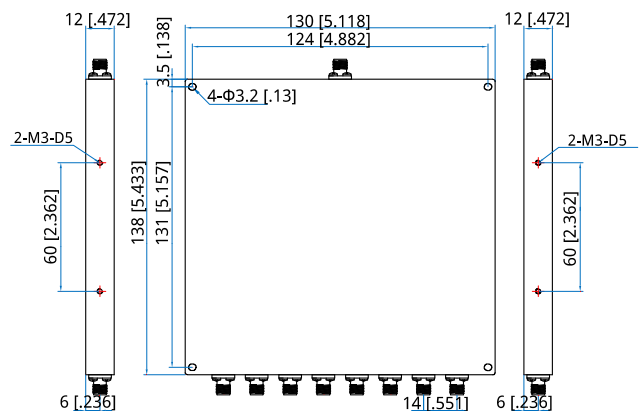

Unit: mm [in]  
 Tolerance: ±0.5mm [±0.02in]

#### How To Order

### QPD8-223-235

Customization is available upon request.