

QPD8-30-3000-2-S

8-Way, 0.03~3GHz, 2W

Features:

- * Small Size
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Mixers
- * Antennas
- * Laboratory Test

Electrical

Frequency:	0.03~3GHz
Insertion Loss:	18.5dB max.
Input VSWR:	1.3 max.
Output VSWR:	1.3 max.
Isolation:	17dB min.
Amplitude Balance:	0.5dB max.
Phase Balance:	±5°
Impedance:	50Ω
Average Power:	2W

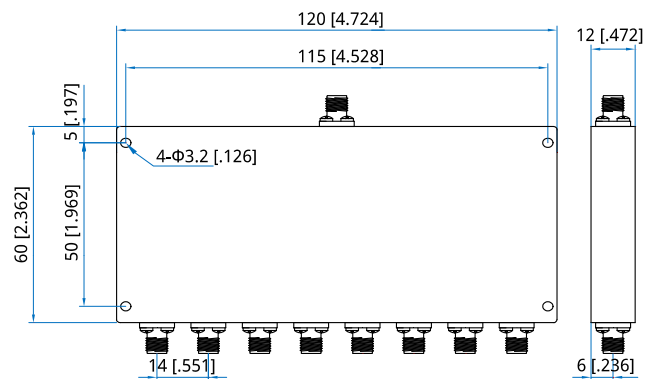
Mechanical

Size*1:	120*60*12mm 4.724*2.362*0.472in
Weight:	211g
Connectors:	SMA Female
Mounting:	4-Φ3.2mm through-hole

[1] Exclude connectors.

Environmental

Operation Temperature:	-35~+75°C
------------------------	-----------

Outline Drawings


Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

How To Order

QPD8-30-3000-2-S

Customization is available upon request.