

QPD8-500-6000

8-Way, 0.5~6GHz

Features:
 * Small Size
 * Low Insertion Loss

Applications:
 * Amplifiers
 * Mixers
 * Antennas
 * Laboratory Test

Electrical

Frequency:	0.5~6GHz
Insertion Loss:	3.0dB max.
Input VSWR:	1.4 max.
Output VSWR:	1.3 max.
Isolation:	18dB min.
Amplitude Balance:	0.4dB max.
Phase Balance:	±4° (SMA) ±5° (N)
Impedance:	50Ω
Average Power:	30W max. 2W max. as combiner

Mechanical

Mounting:	4-Φ3.2mm through-hole (SMA) 4-Φ4.2mm through-hole (N)
-----------	--

Environmental

Operation Temperature: -35~+75°C

How To Order

QPD8-500-6000-X-Y

X: Average power as divider

Y: Connector type

Connector naming rules:

S - SMA Female (Outline A)


N - N Female (Outline B)

Examples:


To order a 8-way power divider, 0.5~6GHz, 30W, N female, specify QPD8-500-6000-30-N.

Customization is available upon request.

Outline Drawings

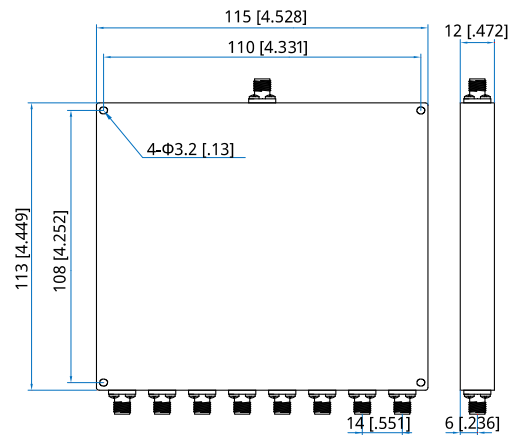

Outline A

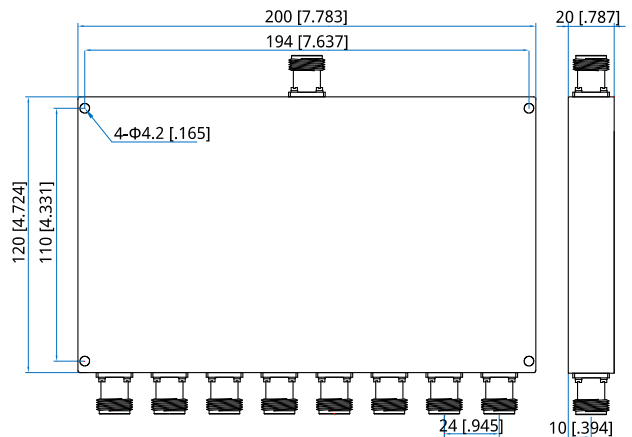

Outline B

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]