

QPD8-950-2150

8-Way, 0.95~2.15GHz

Features:
 * Small Size
 * Low Insertion Loss

Applications:
 * Amplifiers
 * Mixers
 * Antennas
 * Laboratory Test

Electrical

Frequency:	0.95~2.15GHz
Insertion Loss:	3dB max. (SMA, N&SMA) 1.2dB max. (N) 0.8dB max. (TNC)
Input VSWR:	1.25 max.
Output VSWR:	1.2 max.
Isolation:	30dB min. (SMA, N&SMA) 22dB min. (N) 20dB min. (TNC)
Amplitude Balance:	0.3dB max. (SMA, N&SMA, TNC) 0.4dB max. (N)
Phase Balance:	±3° (SMA, N&SMA, TNC) ±4° (N)
Impedance:	50Ω
Average Power:	30W max. 2W max. as combiner

Mechanical

Mounting:	4-Φ3.2mm through-hole (SMA, N) 4-Φ4.4mm through-hole (TNC) 4-Φ4.5mm through-hole (N&SMA)
-----------	--

Environmental

Operation Temperature: -35~+75°C

How To Order

QPD8-950-2150-X-Y

X: Average power as divider

Y: Connector type

Connector naming rules:

S - SMA Female (Outline A)

N - N Female (Outline B)

T - TNC Female (Outline C)


NS - N&SMA Female (Outline D)

Examples:


To order a 8-way power divider, 0.95~2.15GHz, 30W, N female, specify QPD8-950-2150-30-N.

Customization is available upon request.


Outline Drawings




Outline A

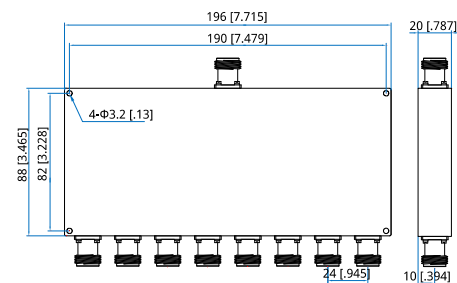

Outline B

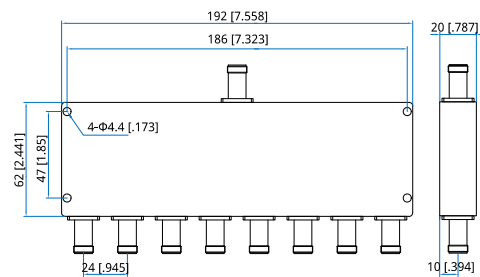

Outline C

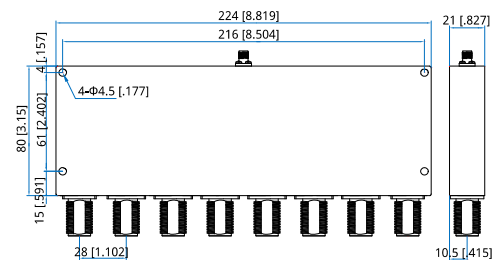

Outline D

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]