

QPS2-500-2500-R

SP2T, 0.5~2.5GHz, Reflective

Features:

- * Low Insertion Loss
- * High Isolation

Applications:

- * Wireless
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	0.5~2.5GHz
Insertion Loss:	1dB max.
Isolation:	45dB min.
Input VSWR:	1.5 max.
Output VSWR:	1.5 max.
Switich Time	12ms max.
(50%TTL~90/10%RF):	
Average Power:	15W max.
Impedance:	50Ω
Voltage:	+5/+28V DC
Current:	200mA max. @+28V
Current:	70mA max. @+5V
Control:	TTL High - 1
	TTL Low/NC - 0

Mechanical


Size*1:	50.8*57.16*17.78mm
	2*2.25*0.7in
RF Connectors:	SMA Female
Mounting:	6-Φ3.2mm through-hole

[1] Exclude connectors.

Environmental

Operating Temperature:	-20~+80°C
Non-operating Temperature:	-55~+85°C

Outline Drawings

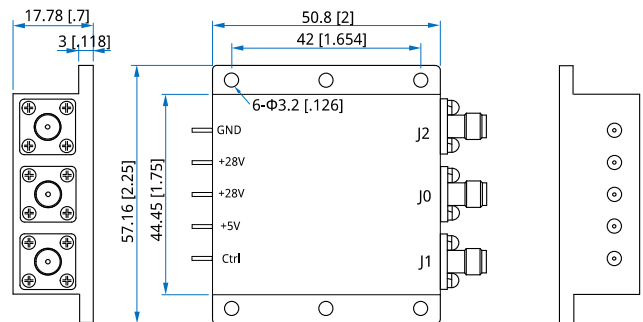

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

Control True Table

Ctrl	Connection
0	J0 - J1 On, J0 - J2 Off
1	J0 - J2 On, J0 - J1 Off

How To Order

QPS2-500-2500-R

Customization is available upon request.