

QPS4-8000-40000-A

SP4T, 8~40GHz, Absorptive

Features:

Applications: * Wireless

* Low Insertion Loss * High Isolation

* Transmitter

* Laboratory Test

* Radar

Electrical

Frequency: 8~40GHz
Insertion Loss: 6.5dB max.
Isolation: 60dB min.
On/Off Delay: 50nS max.
VSWR: 3 max.
Impedance: 50Ω

Input Power: 23 dBm max.

Mechanical

Size*1: 31.18*27*12mm

1.228*1.063*0.472in

RF Connectors: 2.92mm Female

Weight: 23g Material: Aluminum

Outer Conductor: Gold Plating or Nickel plated

Mounting: 3-Φ2.2mm through-hole

[1] Exclude connectors.


Environmental

Operating Temperature: -45~+85°C Non-operating Temperature: -55~+125°C

Pin Numbering

C1	C2	C3	C4	Connection
0	1	1	1	J0-J1
1	0	1	1	J0-J2
1	1	0	1	J0-J3
1	1	1	0	J0-J4

Outline Drawings

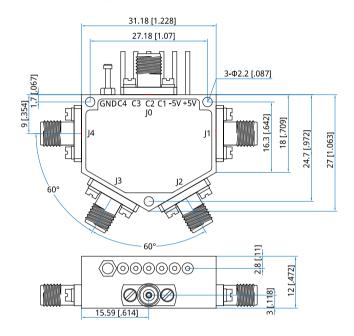

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

sales@qualwave.com

QPS4-8000-40000-A

Customization is available upon request.