

QRF-1805-1880-60

1.805~1.88GHz, 60dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Passband:	DC~1.78GHz 1.905~5.2GHz
Passband Insertion Loss:	2dB max. (at the corner: 3.0dB Max.)
Passband VSWR:	1.5 max.
Stopband:	1.805~1.88GHz
Stopband Attenuation:	60dB min.
Average Power:	30W max.
Impedance:	50Ω

Mechanical


Size*1:	245*53*22mm 9.646*2.087*0.866in
RF Connectors:	SMA Female
Mounting:	4-Φ3.4mm through-hole

[1] Exclude connectors.

Environmental

Temperature:	-20~+60°C
--------------	-----------

Outline Drawings

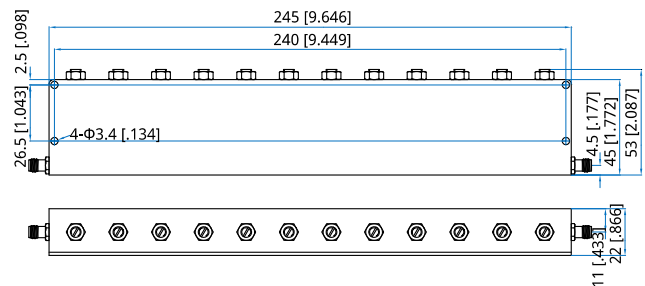

Unit: mm [in]

Tolerance: ±0.8mm [±0.031in]

How To Order

QRF-1805-1880-60

Customization is available upon request.