

QRF-2000-2300-50

2~2.3GHz, 50dB

Features: * High Stopband Rejection * Small Size	Applications: * Telecom * Laboratory Test * Receivers * Instrumentation
---	--

Electrical

Passband:	DC~1.9GHz 2.4~5.1GHz
Passband Insertion Loss:	1.5dB max.
Passband VSWR:	1.5 max. @0.75~1.9GHz 1.5 max. @2.4~5.1GHz 1.8 max. @DC~0.75GHz
Stopband:	2~2.3GHz
Stopband Attenuation:	50dB min.
Average Power:	10W max.
Impedance:	50Ω

Mechanical


Size ^{*1} :	209*47*22mm 8.228*1.85*0.866in
RF Connectors:	SMA female
Mounting:	4-Φ3.4mm through-hole

[1] Exclude connectors.

Environmental

Temperature: -30~+70°C

Outline Drawings

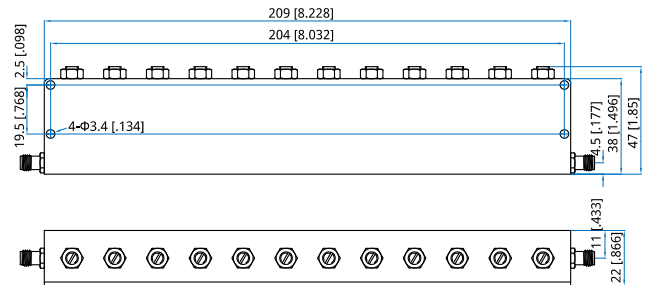

Unit: mm [in]
 Tolerance: ±0.8mm [±0.031in]

How To Order
QRF-2000-2300-50

Customization is available upon request.