

QRF-2110-2170-60

2.11~2.17GHz, 60dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Passband:	DC~2.07GHz 2.21~6GHz
Passband Insertion Loss:	3dB max.
Passband VSWR:	2 typ.
Stopband:	2.11~2.17GHz
Stopband Attenuation:	60dB min.

Mechanical

Size*1:	165*31*27mm 6.496*1.22*1.063in
RF Connectors:	SMA Female
Mounting:	4-Φ2.4mm through-hole


[1] Exclude connectors.

How To Order


QRF-2110-2170-60

Customization is available upon request.

Typical Performance Curves

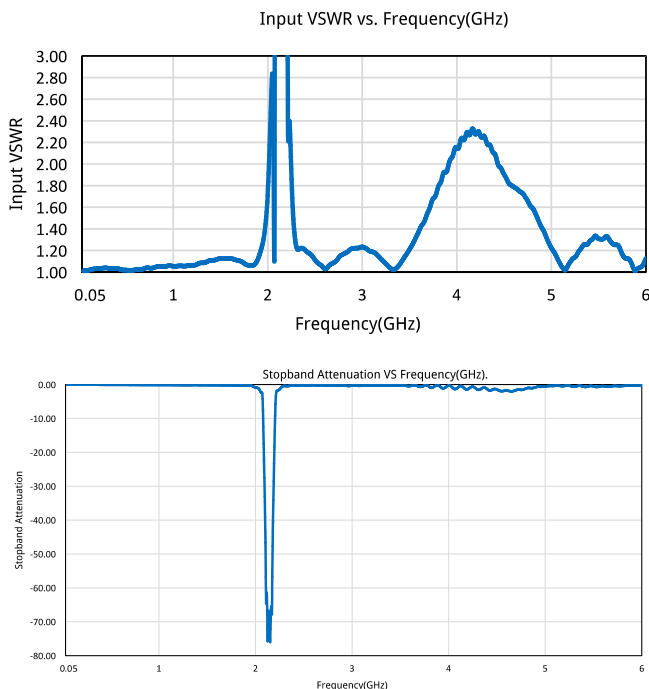

Outline Drawings

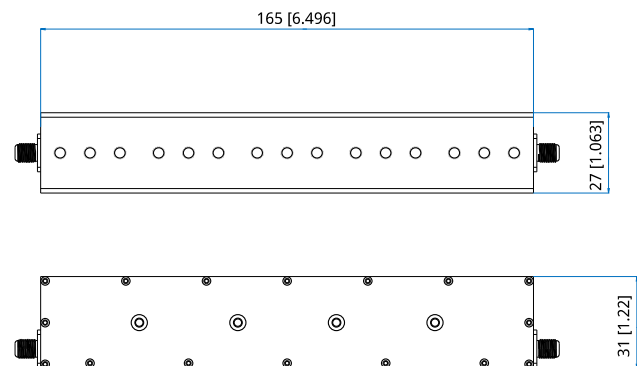

Unit: mm [in]

Tolerance: $\pm 0.8\text{mm}$ [$\pm 0.031\text{in}$]

How To Order

QRF-2110-2170-60

Customization is available upon request.

