

QRF-2400-2483.5-30

2400~2483.5MHz, 30dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Passband:	DC~2345MHz 2538~15000MHz
Passband Insertion Loss:	3dB max.
VSWR:	2 max.
Stopband:	2400~2483.5MHz
Stopband Attenuation:	30dB min.
Average Power:	2W

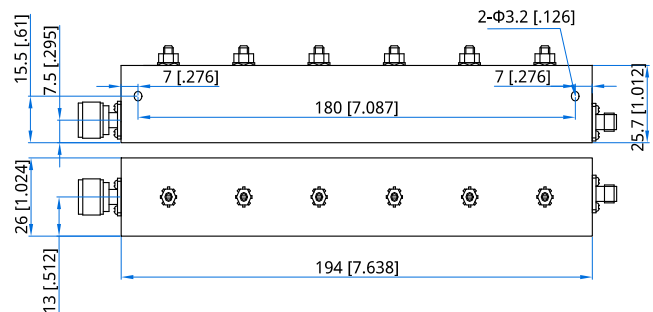
Mechanical

Size*1:	194*26*25.7mm 7.638*1.024*1.012in
RF Connectors:	SMA Male, SMA Female
Mounting:	2- Φ 3.2mm through-hole

[1] Exclude connectors.

Environmental

Temperature:	+10~+40°C
--------------	-----------

Outline Drawings


Unit: mm [in]

Tolerance: ± 0.2 mm [± 0.008 in]

How To Order

QRF-2400-2483.5-30

Customization is available upon request.