

QRF-2500-2690-40

2.5~2.69GHz, 40dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Passband:	DC~2.481GHz 2.705~3GHz
Passband Insertion Loss:	3.2dB max. @2.476~2.481&2.705~2.71GHz 2dB max. @DC~2.476&2.71~3GHz
Passband VSWR:	3 max. @2.476~2.481&2.705~2.71GHz 2 max. @DC~2.476&2.71~3GHz
Stopband:	2.5~2.69GHz
Stopband Attenuation:	40dB min.
Average Power:	50W max.
Impedance:	50Ω

Mechanical


Size*1:	352*43*36mm 13.858*1.693*1.417in
RF Connectors:	SMA Female
Mounting:	2-Φ3.2mm through-hole

[1] Exclude connectors.

Environmental

Temperature:	0~+55°C
--------------	---------

Outline Drawings

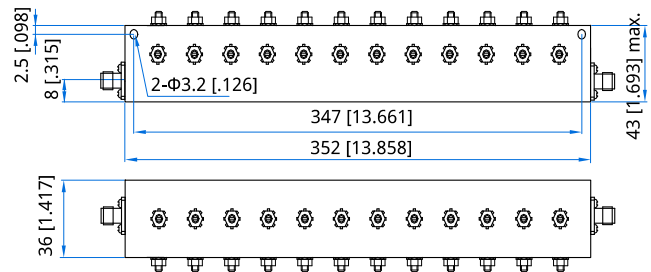

Unit: mm [in]

Tolerance: ±0.8mm [±0.031in]

How To Order

QRF-2500-2690-40

Customization is available upon request.