

QRF-3300-3800-60

3.3~3.8GHz, 60dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Passband:	DC~3.05GHz 4.05~15GHz
Passband Insertion Loss:	2.5dB max.
VSWR:	2 max.
Stopband:	3.3~3.8GHz
Stopband Attenuation:	60dB min.
Average Power:	1W max.


Mechanical

RF Input Connector:	SMA Female
RF Output Connector:	SMA Male
Mounting:	4- Φ 2.7mm through-hole

Environmental

Operating Temperature:	-10~+40°C
------------------------	-----------

Outline Drawings

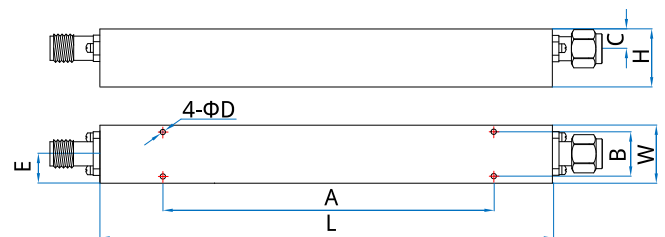

Size	L	W	H	A	B	C	D	E
mm	175.8	18	17.1	130	13	5.2	2.7	9
in	6.921	0.709	0.673	5.118	0.512	0.205	0.106	0.354

Unit: mm [in]

Tolerance: ± 0.2 mm [± 0.008 in]

How To Order

QRF-3300-3800-60

Customization is available upon request.