

QRF-3420-3700-60

3.42~3.7GHz, 60dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Passband:	DC~3.27GHz
	3.85~15GHz
Passband Insertion Loss:	2.5dB max.
VSWR:	2 max.
Stopband:	3.42~3.7GHz
Stopband Attenuation:	60dB min.
Average Power:	1W max.


Mechanical

RF Input Connectors:	SMA Female
RF Output Connectors:	SMA Male
Mounting:	4-Φ2.7mm through-hole

Environmental

Operating Temperature:	-10~+40°C
------------------------	-----------

Outline Drawings

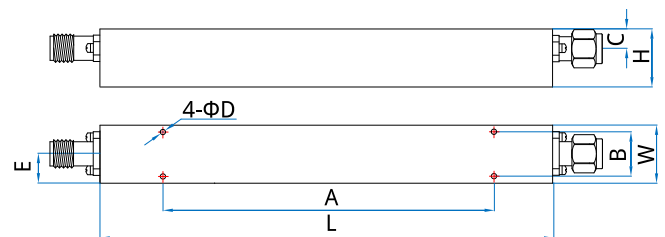

Size	L	W	H	A	B	C	D	E
mm	159.6	17	17.5	112	12	5.2	2.7	8.5
in	6.283	0.669	0.689	4.409	0.472	0.205	0.106	0.335

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

QRF-3420-3700-60

Customization is available upon request.