

QRF-600-700-45

0.6~0.7GHz, 45dBc

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Passband:	DC~0.5GHz 0.8~2.5GHz
Passband Insertion Loss:	2dB max.
Passband VSWR:	1.8 max.
Stopband:	0.6~0.7GHz
Stopband Attenuation:	45dBc min.
Average Power:	10W max.
Impedance:	50Ω

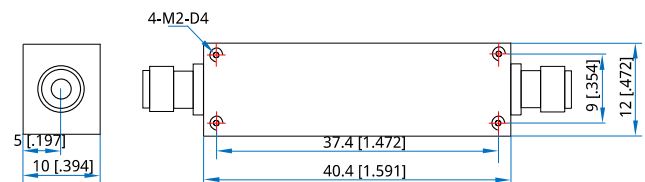
Mechanical

Size* ¹ :	40.4*12*10mm 1.591*0.472*0.394in
RF Connectors:	SMA Female
Mounting:	4-M2. depth 4mm

[1] Exclude connectors.

Environmental

Operating Temperature:	-40~+70°C
Non-operating Temperature:	-55~+85°C

Outline Drawings


Unit: mm [in]

Tolerance: ±0.8mm [±0.031in]

How To Order

QRF-600-700-45

Customization is available upon request.