

QRF-703-748-50

703~748MHz, 50dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

| | |
|--------------------------|--------------------------|
| Passband: | DC~683MHz 768~4000MHz |
| Passband Insertion Loss: | 2dB max. |
| VSWR: | 2 max. |
| Stopband: | 703~748MHz |
| Stopband Attenuation: | 50dB min. |
| Average Power: | 10W max. |

Mechanical


| | |
|----------------|-------------------------------------|
| Size*1: | 284*68*36mm 11.181*2.677*1.417in |
| RF Connectors: | N Female |
| Mounting: | 4-Φ4mm through-hole |

[1] Exclude connectors.

Environmental

| | |
|----------------------------|-----------|
| Operating Temperature: | +10~+30°C |
| Non-operating Temperature: | +10~+30°C |

Outline Drawings

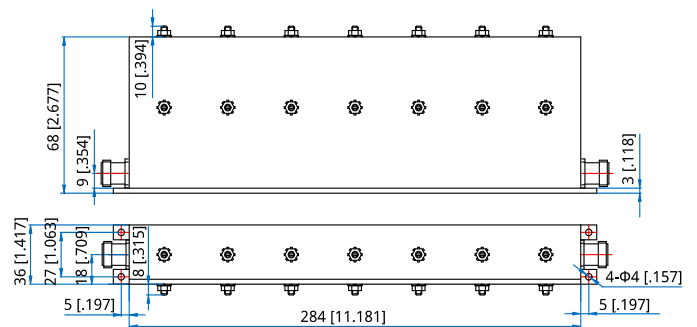

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

QRF-703-748-50

Customization is available upon request.