

QRF-758-803-40

758~803MHz, 40dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Passband:	DC~743MHz 818~3000MHz
Passband Insertion Loss:	2.5dB max.
Passband VSWR:	2 max.
Stopband:	758~803MHz
Stopband Attenuation:	40dB min.
Average Power:	50W max.
Impedance:	50Ω

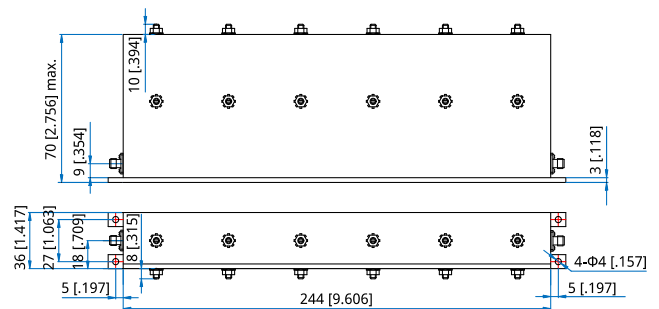
Mechanical

Size ^{*1} :	244*70*36mm 9.606*2.756*1.417in
RF Connectors:	SMA Female
Mounting:	4-Φ4mm through-hole

[1] Exclude connectors.

Environmental

Temperature:	0~+55°C
--------------	---------

Outline Drawings


Unit: mm [in]

Tolerance: ±0.8mm [±0.031in]

How To Order

QRF-758-803-40

Customization is available upon request.