

QSDC-12000-13000-10-6-S

12~13GHz, 10W, 6dB

Features:

- * Broadband
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	12~13GHz
Insertion Loss:	0.8dB max.
Coupling:	6±1dB
Coupling Flatness:	±1dB max.
Directivity:	12dB min.
VSWR:	1.5 max.
Average Power:	10W max.

Mechanical


Size*1:	56*15*11mm 2.205*0.591*0.433in
Connectors:	SMA Female
Mounting:	3-Φ2.2mm through-hole

[1] Exclude connectors and terminations.

Environmental

Temperature:	-40~+80°C
--------------	-----------

Outline Drawings

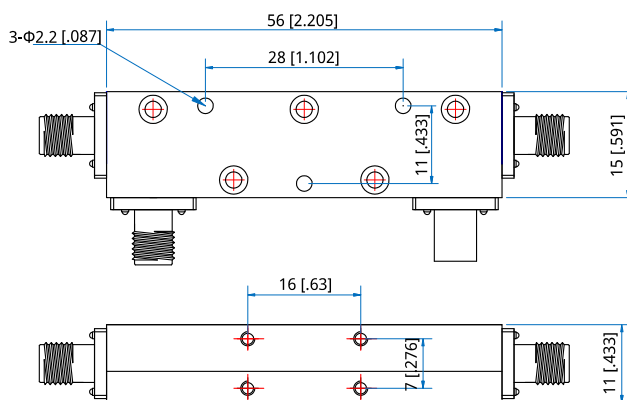

Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]

How To Order

QSDC-12000-13000-10-6-S

Customization is available upon request.