



QSDC-1290-1310-K1-20-N

1.29~1.31GHz, 100W, 20dB

Features:
* Broadband
* Low Insertion Loss

Applications:
* Amplifiers
* Transmitter
* Laboratory Test

* Radar

Electrical

Frequency: 1.29~1.31GHz
Insertion Loss: 0.5dB max.
Coupling: 20±1dB
Directivity: 20dB min.

 $\begin{array}{ccc} & VSWR: & 1.3 \ max. \\ Average \ Power: & 100W \\ & Impedance: & 50\Omega \end{array}$

Mechanical

Size*1: 120*40*16.5mm


4.724*1.575*0.65in

Connectors: N Female

Mounting: 2-Φ4mm through-hole

[1] Exclude connectors and terminations.

Outline Drawings

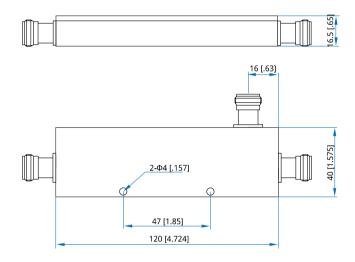

Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]

How To Order

QSDC-1290-1310-K1-20-N

Customization is available upon request.