

QSDC-200-2000-50-30-S

0.2~2GHz, 50W, 30dB

Features:

- * Broadband
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	0.2~2GHz
Insertion Loss:	0.8dB max.
Coupling:	30±1.5dB
Coupling Flatness:	±1.5dB max.
Directivity:	15dB min.
VSWR:	1.3 max.
Average Power:	50W max.

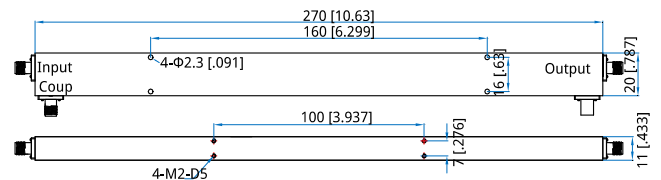
Mechanical

Size ^{*1} :	270*20*11mm 10.630*0.787*0.433in
Connectors:	SMA Female
Mounting:	4-Φ2.3mm through-hole

[1] Exclude connectors and terminations.

Environmental

Temperature:	-45~+85°C
--------------	-----------

Outline Drawings


Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]

How To Order

QSDC-200-2000-50-30-S

Customization is available upon request.