

QSDC-2000-18000-30

2~18GHz, 30W

Features:

- * Broadband
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	2~18GHz
Insertion Loss:	1dB max.
Coupling:	10, 20, 30dB
Coupling Flatness:	±1dB max.
Directivity:	12dB min.
	10dB min. for 30dB coupling
VSWR:	1.6 max.
Average Power:	30W

Mechanical


Size ^{*1} :	43*15*11mm 1.693*0.591*0.433in
Connectors:	SMA Female
Mounting:	3-Φ2.2mm through-hole 4-M2, depth 5mm

[1] Exclude connectors and terminations.

Environmental

Operating Temperature:	-30~+70°C
Non-operating Temperature:	-40~+80°C

Outline Drawings

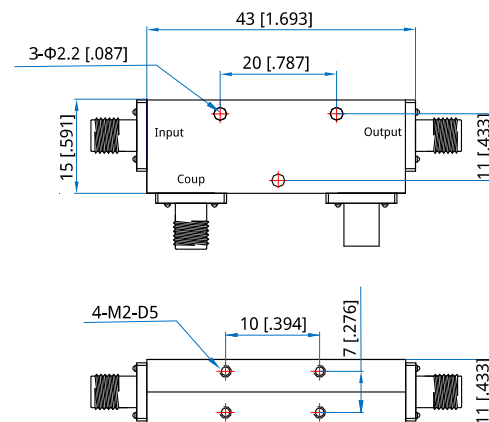

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

How To Order

QSDC-2000-18000-30-X-Y

X: Coupling: 10, 20, 30

Y: Connector type

Connector naming rules:

S - SMA Female

Examples:

To order a single directional coupler, 2~18GHz, 30W, 10dB, SMA, specify QSDC-2000-18000-30-10-S.

Customization is available upon request.