

## QSDC-2000-40000-30-20-K

2~40GHz, 30W, 20dB

### Features:

- \* Broadband
- \* Low Insertion Loss

### Applications:

- \* Amplifiers
- \* Transmitter
- \* Laboratory Test
- \* Radar

### Electrical

Frequency:	2~40GHz
Insertion Loss:	1.5dB max.
VSWR:	1.7 max.
Directivity:	10dB min.
Coupling:	20±1.5dB
Frequency Sensitivity:	±1.0dB max.
Impedance:	50Ω
Average Power:	30W

### Mechanical


Size <sup>*1</sup> :	48*15*11mm 1.89*0.591*0.433in
Connectors:	2.92mm Female
Mounting:	3-Φ2.3mm through-hole

[1] Exclude connectors and terminations.

### Environmental

Temperature:	-45~+85°C
--------------	-----------

### Outline Drawings

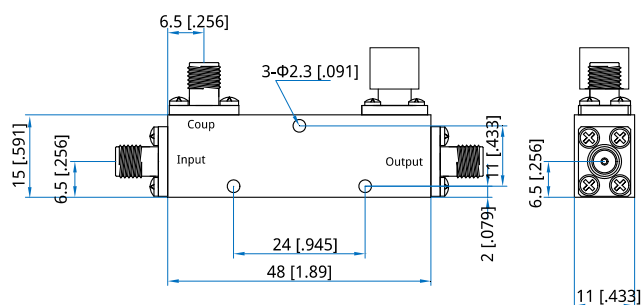

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

### How To Order

**QSDC-2000-40000-30-20-K**

Customization is available upon request.