

QSDC-2000-8000-50-30-S

2~8GHz, 50W, 30dB

Features:

- * Broadband
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	2~8GHz
Insertion Loss:	0.4dB max.
VSWR:	1.2 max.
Directivity:	20dB min.
Coupling:	30±1dB
Impedance:	50Ω
Average Power:	50W

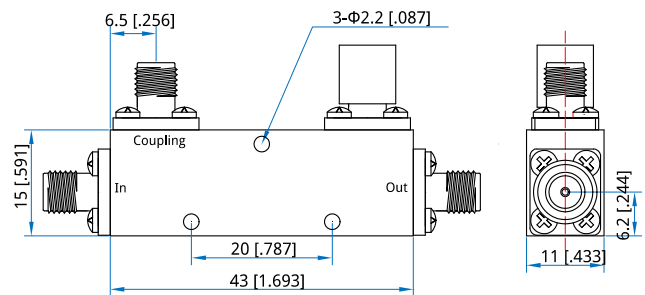
Mechanical

Size ^{*1} :	43*15*11mm 1.693*0.591*0.433in
Connectors:	SMA female
Mounting:	3-Φ2.2mm through-hole

[1] Exclude connectors and terminations.

Environmental

Temperature:	-35~+75°C
--------------	-----------

Outline Drawings


Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

How To Order

QSDC-2000-8000-50-30-S

Customization is available upon request.